


ARB **AIR**

LOCKER

**AIR OPERATED
LOCKING DIFFERENTIALS**

PRODUCT RELEASE

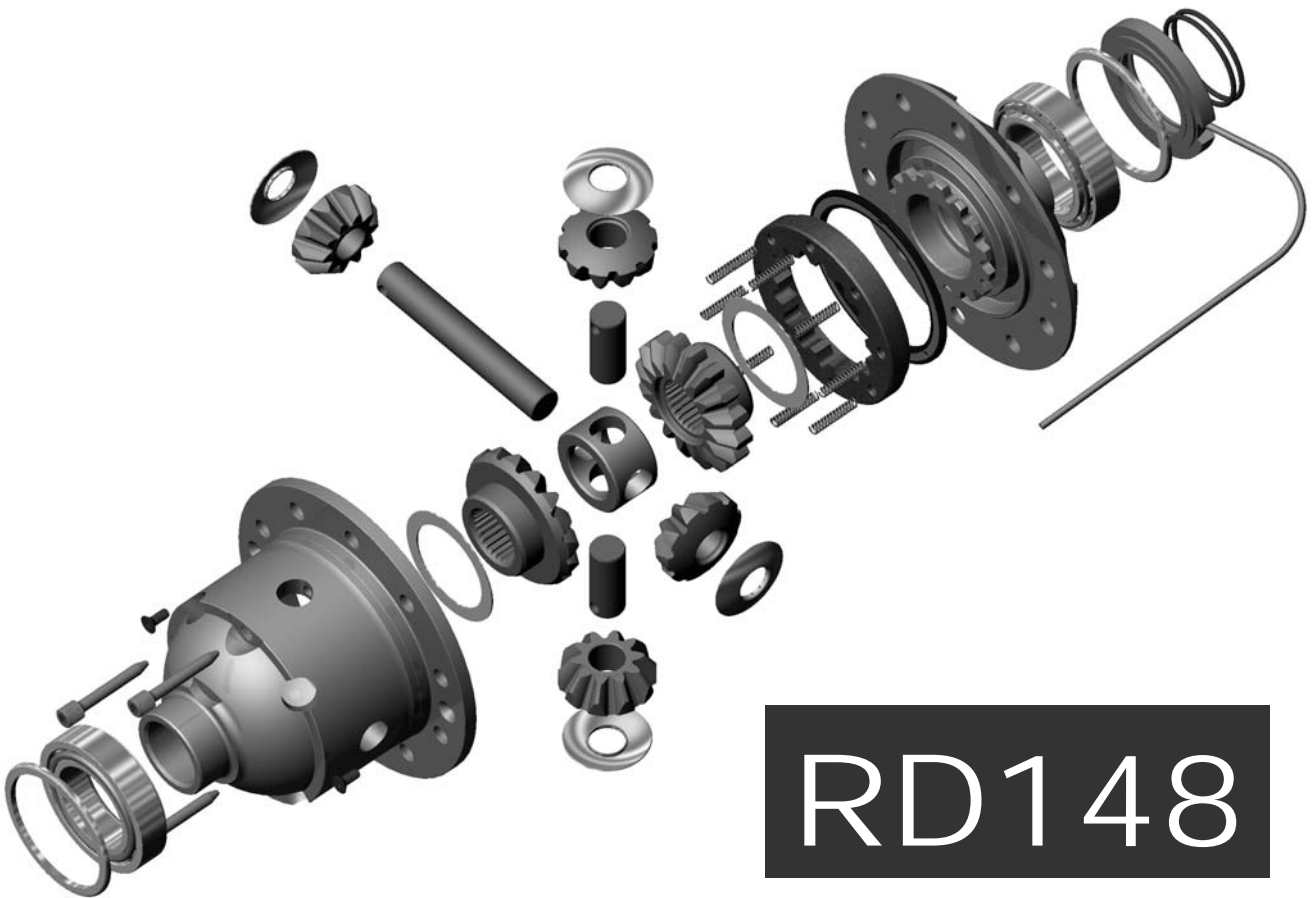

RD148

AAM 760,28 SPL

Copyright © 2009 by ARB Corporation Limited

No liability is assumed for damages resulting in the use of the information contained herein.
ARB Air Locker Air Operated Locking Differentials and Air Locker are trademarks of ARB Corporation Limited.
Other product names used herein are for identification purposes only and may be trademarks of their respective owners.

ARB 4x4 ACCESSORIES

Corporate Head Office

42-44 Garden St
Kilsyth, Victoria
AUSTRALIA
3137

Tel: +61 (3) 9761 6622
Fax: +61 (3) 9761 6807

Australian enquiries

North and South American enquiries

Other international enquiries

sales@arb.com.au

sales@arb.com.au

exports@arb.com.au

www.arb.com.au

ARB RD148

AAM 760,28 SPL

Specifications:

- 28 spline axle.
- 30.5mm [1.20"] axle shaft diameter (outside of splines).
- 10 bolt ring gear.
- 117.51mm [4.63"] dia. ring gear ID.
- 193mm [7.6"] dia. ring gear OD.

Model Range:

- H3 Hummer, GMC Canyon, Chevrolet Colorado front.

Features:

- Patented 'timed' locking mechanism offers high strength and ultra fast un-locking (**#5, #12 & #14**).
- Comprehensive photo illustrated installation and service guides covering both aluminium housing and cast iron housing installations.
- Steel reinforced, elastomer bonded annular seal designed to handle the most extreme climactic temperatures on earth (**#4**).
- Patented 2 piece design offers a range of interchangeable side gears (sold separately) to integrate with non-standard axle shaft splines.
- Larger ID of replacement tapered roller bearings offers 85% increase in load capacity at the bearing journals.
- Both high quality Timken tapered roller bearings are commonly available sizes but are included in the ARB Air Locker kit.

RD148 AAM 760,28 SPL

